


SMARTER

# BALANCE



The way we used to create balance was to mount the appropriate counterbalancing weight on the rear of the frame like this.

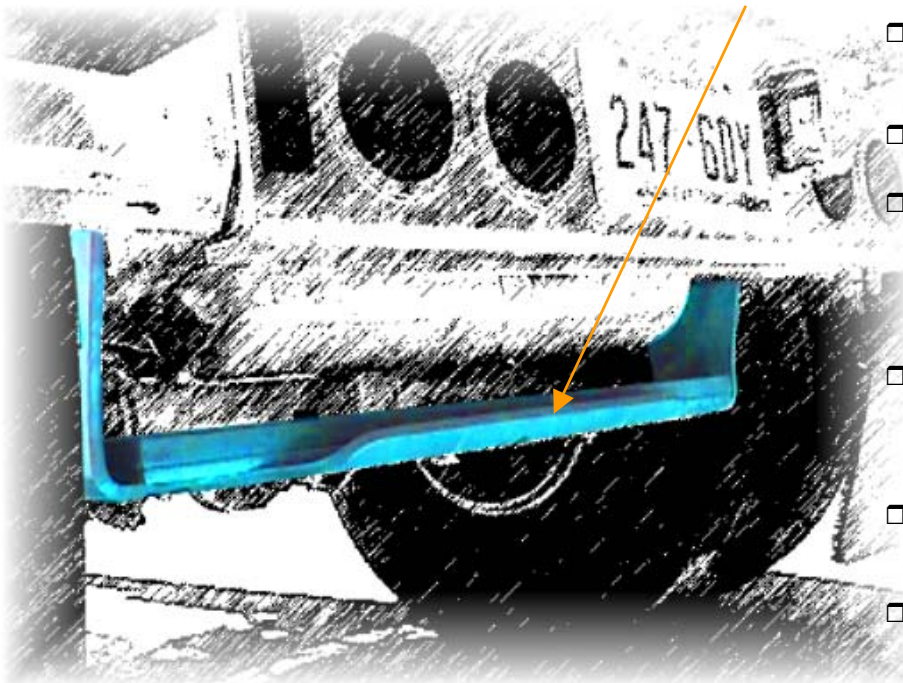

**Counterbalance** is now mounted under the air tank, about midway between the axle and the rear of the frame.

- ❑ **Stronger attachment points for better fatigue resistance.**
- ❑ **Reduced levels of stress.**
- ❑ **Lower and closer to the axle resulting in smoother balance when lifting the drawbar.**
- ❑ **Just as easy to lift initially without going to negative tongue weight as quickly.**
- ❑ **Added protection for the air tank.**
- ❑ **Dolly can still be tilted all the way back for ease of maintenance and/or storage.**
- ❑ **Drains water, snow and gravel.**



## SILVER EAGLE

MANUFACTURING COMPANY

Larry Draper - VP Sales & Marketing - Direct Phone: (503) 335-2143 Cell Phone: (360) 901-9200

5825 NE Skyport Way - Portland, OR 97218 (800) 547-6792 FAX (503) 335-2171

Email: larry.draper@silvreeagle.com